

Quick Start

Contents in Carton

Setting Your Printer

Installing Ribbon Cartridge

Installing Card/ Photo paper

System Requirements

Installing Driver

Customer Service

Contact Information

About PhotoDesiree

Installing Software

User Interface


Printing Photo

● Quick Start

Contents in Carton

Before you begin to install printer, please check you have the following items.

- HiTi Photo/ Card Printer 640Amphi x 1
- Plastic Card Cassette x 1
- Photo Paper Cassette x 1
- Power Cord x 1
- USB Cable x 1
- CD (Windows Driver, PhotoDesiree, CardDesiree) x 1
- Printer/ Software User Manual x 2
- Trial Clean Kit (2 sheets clean paper) x 1
- Warranty Card x 1

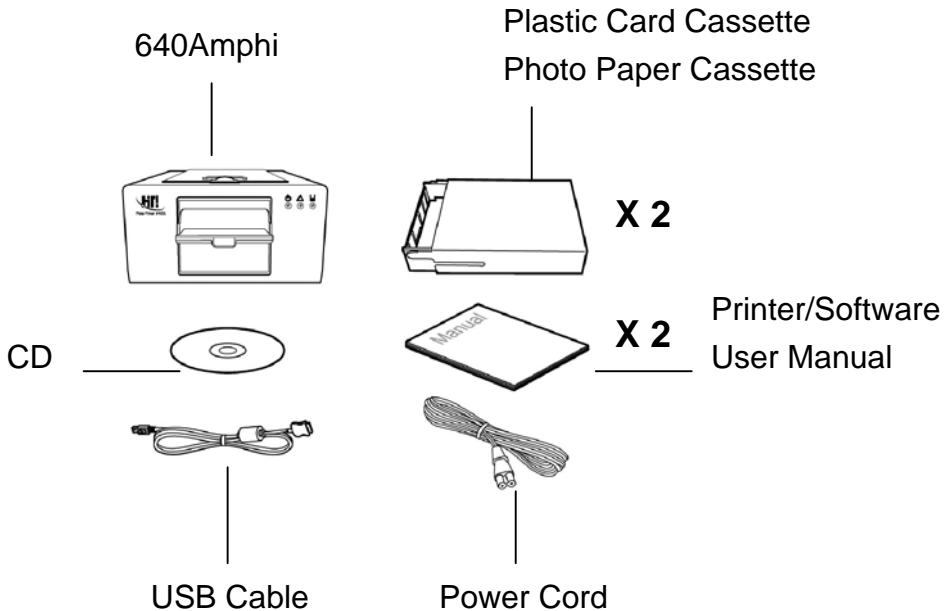


- Quick Start


Setting Your Printer

You may setup HiTi 640Amphi printer in the following steps.

1. Connect the power cord to the printer.

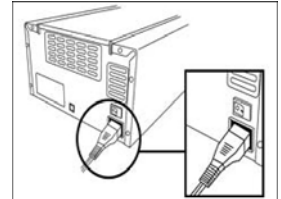

2. Connect the printer to your computer using the USB cable.

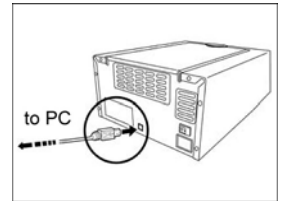

3. Insert the ribbon cartridge into the printer; please see P.XX for more information.
4. Place photo paper or plastic card into the cassette; please see P.XX for more information.
5. Turn the printer power switch on. The green LED will blink for 5 seconds and then stay on. Before you turn on the power switch, please make sure the printer driver software is installed in your personal computer. Please see P.XX for more information about driver installation.
6. The New Hardware Found message dialog will appear on the screen of your computer. Windows will begin to install the printer driver.

 **Notice!!**


Please always turn the power switch off before connecting or disconnecting the printer from the power source.

- Quick Start


Installing Ribbon Cartridge

You may install the ribbon cartridge in the following steps.


1. Push the slider to open the top cover of the printer.

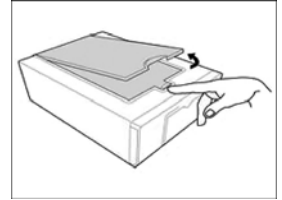


2. Hold the ribbon cartridge as the figure illustrated. Be sure to point the arrow sign towards the left-hand side of the printer.

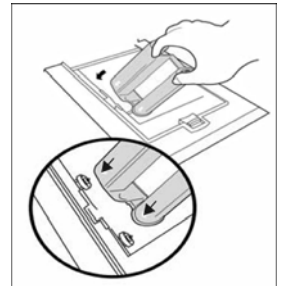

3. Insert the cartridge all the way into the printer until it is properly seated.

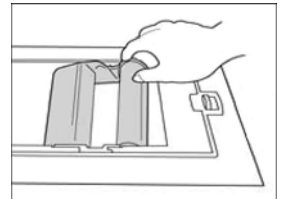

4. Close the top cover.

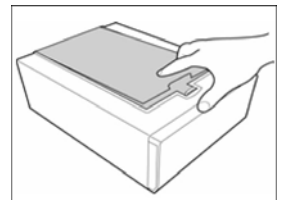

 Notice!!



1. Please check the LED indicator should be green after door closed, if LED indicator is orange, try to close the ribbon door again.

● Quick Start



Installing Paper/Card

You may install the photo paper or the plastic card in the followings steps.

1. Open the cover of the paper cassette.
2. Remove the clean roller of the plastic card cassette.

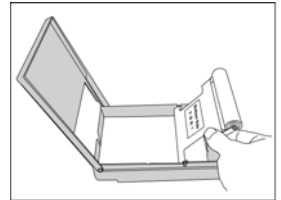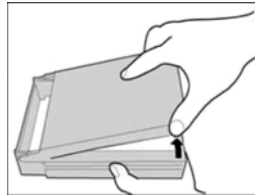


3. When you place a stack of plastic card into the plastic card cassette, please make sure the notch is close to right side, please refer to illustration.

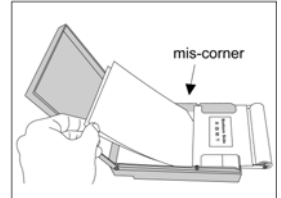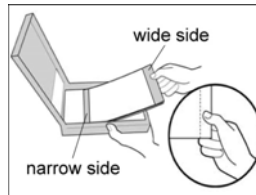


When you place a stack of photo paper into the photo paper cassette, please make sure the wider blank part of photo paper is close to cassette–open side, please see instruction on paper package for more information.

4. Insert the plastic card cassette into the printer.

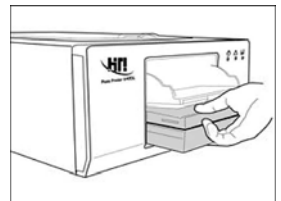

⚠ Notice !!

1. Maximum photo paper capacity of 640Amphi is 100 sheets. Maximum plastic card capacity is 50 sheets or 25 sheets for the adhesive plastic card.

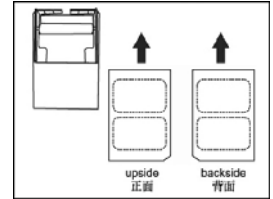

2. When doing double-sided card printing, please align the card notch to the right side of the cassette when printing the front side of the card. When printing the back side of the card, please align the plastic card to the left side of the cassette.

● Quick Start

System Requirement

Please make sure your PC conforms to the following requirements.

- Intel Pentium or compatible PC
- Windows 98/ME/2000/XP
- 128MB RAM or greater
- Available USB port
- 100MB or greater free hard disk space
- CD-ROM Drive

Notice!!

1. Microsoft, MS, MS-DOS and Windows are registered trademarks of Microsoft Corporation.
2. Pentium is a U.S. registered trademark of Intel Corporation.
3. Brands and product names are trademarks or registered trademarks of their respective companies.

● Quick Start

Installing Driver

You may install HiTi 640DL-Amphi Diver into your PC in the following steps.



1. Insert “Driver CD” into the CD-ROM drive. If the installation doesn’t start automatically; execute the “autorun.exe” in the disk.
2. Select “Install HiTi 640DL-Amphi Driver” and install.
3. Click button “Start” to install the driver.



4. Connect printer to PC through USB cable and switch the printer's power on.




5. In Windows 2000 or Windows XP, if there's message dialog showing "Digital Signature Not Found" or "Driver Incompatibility", please click "Yes" to continue installing driver.




About PhotoDesiree

Installing Software

You may install HiTi PhotoDesiree 2 into your PC in the following steps.

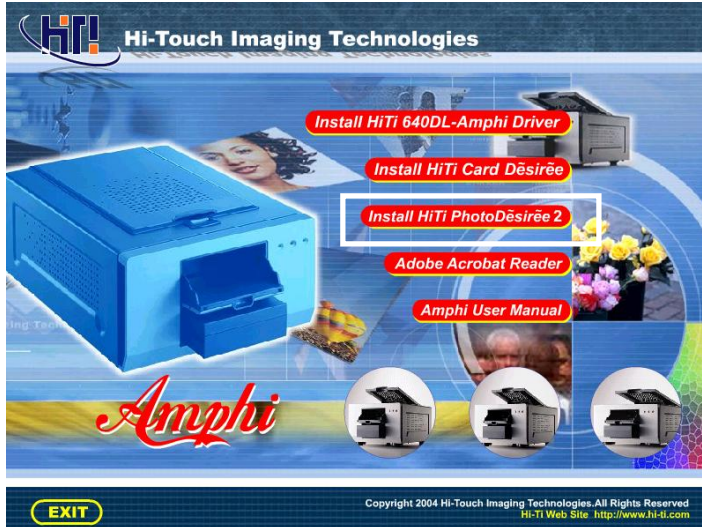

1. Insert “Driver CD” into CD-ROM drive, if the installation doesn’t start automatically; execute the “autorun.exe” in the disk.
2. Select “Install HiTi PhotoDesiree 2” and install.
3. Select language type and destination, then click “Start” button for installation.

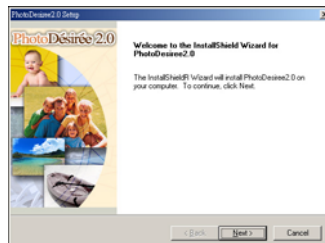

● About PhotoDesiree 2

User Interface

You may learn the HiTi PhotoDesiree 2 user interface from following instruction diagram.

Image Explorer : Load and explore image files.

Image Preview : Select printer, printout format and portrait or landscape.

Image Editor : Edit selected image.

Print Queue : Save images temporarily for printing.

Image Explorer :
Load and explore image files.

Image Preview :
Select printer, printout format
and portrait or landscape.

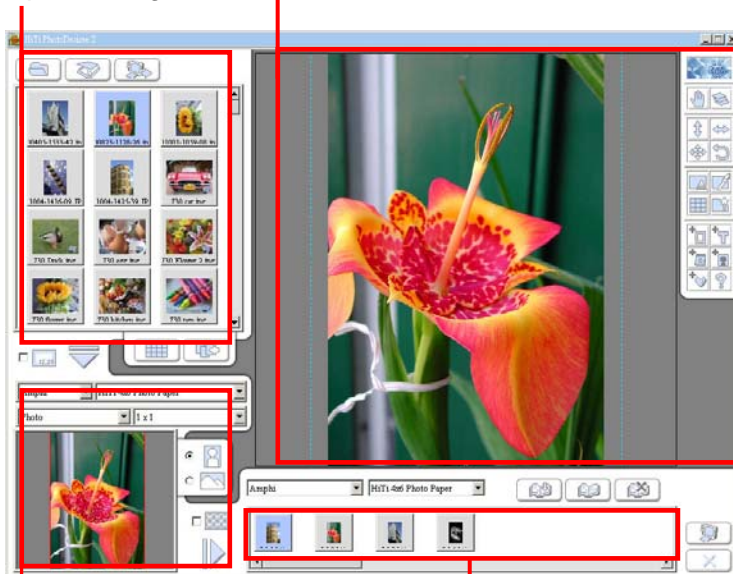


Image Editor :
Edit selected image.


Print Queue :
Save images temporarily for printing.

● About PhotoDesiree 2

Printing a Photo

You may printout your first photo from HiTi PhotoDesiree 2 in the following steps.

1. Load images from a PC, digital camera or scanner.
2. Select “Amphi“, and 4”x6” photo only.
3. Select an image and press triangle button to send selected image to the editing area.
4. Use [Edit Tool] for more image effects.
5. Send edited images to [Print Queue].
6. Press [Print] Button to start printing.

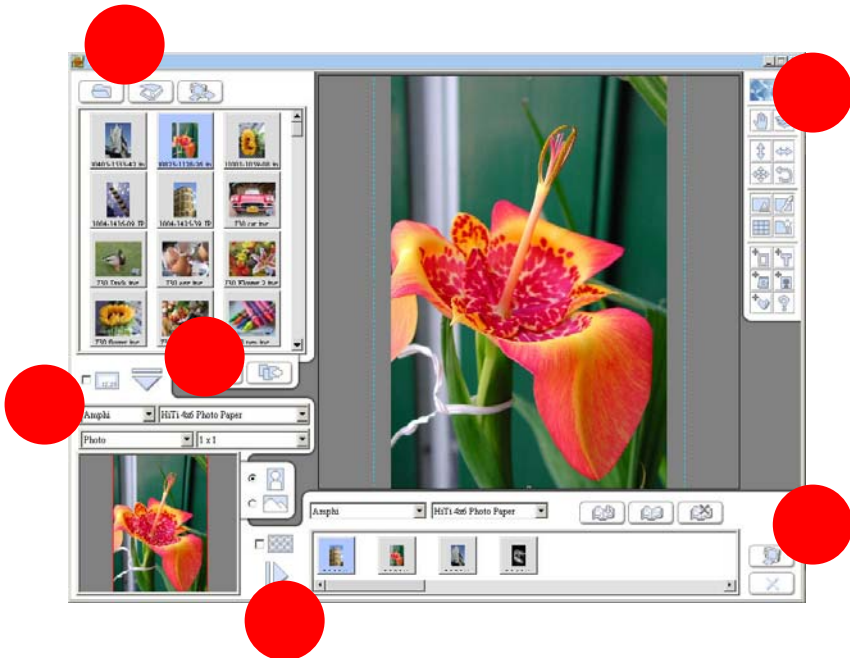

● Quick Start

Customer Service Claim

■ WEB Support

If you need more help, please visit ITCS website, <http://www.i-tcs.co.kr>. You can download new drivers, updated applications and more e-Frames there.

■ Customer Support Center

(1) Procedure for ASS

1) Receive request either by phone or e-mail

HiTi 640Amphi printer Technical Support Team

Tel : +82-2-2103-5337~8 / Fax : +82-2-2103-5334

Homepage : <http://www.i-tcs.co.kr>

2) Technical evaluation by ITCS on the problem

3) Door to Door delivery

① Safe packing is recommend with notice of < handle with care >

② Please mark client info including contact / phone number / nature of defection

③ Address :

#701, Kolon Disital Tower Vilant, 222-7, Guro-Dong, Guro-Gu, Seoul, Korea

(2) etc. inquiries

◆ I-TCS Homepage

Following informations are available in ITCS homepage at www.i-tcs.co.kr

- printer
- printer driver
- Consumables including ribbons and cards

◆ I-TCS Technical Support Team

Please provide following information

- Printer serial No.
- Name of O/S
- Name of O/S
- Description on the problems
- Initial measures taken by the client